



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd
stainless-steelseamlesspipe.com


ASTM/GB/API/DIN/JIS Austenitic Duplex Stainless Steel U Tube for Heat Exchanger Boiler

Our Product Introduction

for more products please visit us on stainless-steelseamlesspipe.com


Basic Information

- Place of Origin: CHINA
- Brand Name: zheheng steel
- Certification: GOST9941-81, CCS, ISO 9001-2008
- Model Number: 304/304L, 0Cr19Ni10, EN1.4306 ect
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: as required
- Delivery Time: 5-8days
- Payment Terms: T/T, L/C
- Supply Ability: 1000+

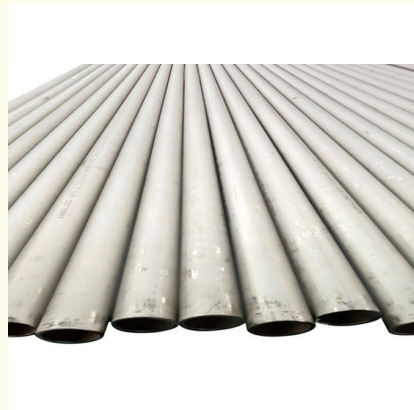

Product Specification

- Medium: Liquid And Gas
- Diameter: 10-2500mm
- MPa Classification: High Pressure Piping
- Certification: ISO
- Standard: ASTM, AISI, GB, DIN, EN
- Type: Stainless Steel Pipes
- Transport Package: Plywood Case
- Payment Terms: T/T, L/C
- Highlight: JIS Stainless Steel Heat Exchanger Tube, Boiler Stainless Steel Heat Exchanger Tube, Duplex Stainless Steel Heat Exchanger Tube

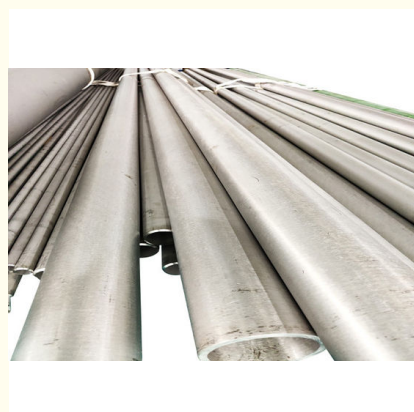

More Images



Product Description

zheheng steel specializes in producing stainless steel seamless pipe. We always put the quality as the first consideration. If you're interested in cooperating with our company, welcome to contact me. We will be happy to give you a quotation upon receipt of your detailed requirements.

Products Description

Type	Seamless/Welded
Size	Outside diameter: 10mm--630mm(seamless); 10mm-2500mm(welded)
Wall thickness	0.5mm--50mm
Standard	ASTM A312,ASTM A269, ASTM213,EN10216-5 ASTM A789 (ASME SA789), ASTM A790 (ASME SA790) etc.
Grade	TP304, 304L, 304H, TP316, 316L, 316H, TP321/321H, TP347/347H, S31803, S32205, S31500, S32304, S32750, S32760 etc.
Surface	Pickling,solid solution, polished or as customer's requirement
Packing	Bundle, plastic bag, woven bag, wooden case
Delivery	stock, 5-30days to port

Stainless steel tube for heat exchanger

Specifications:

- 1) Diameters: 4 - 76.2mm
- 2) W. T.: 0.4 - 2.5mm
- 3) Grades: 316L/304/304L/310S, etc.
- 4) standard: GB/ISO/EN/ASTM/JIS, etc.
- 5) application range: Widely use in the foodstuff, medical equipment, power, boiler, cooler, auto, condenser etc.
- 6) packing: Inner packing: 1 PC/plastic bag; Outer packing: Bundles in weaving bags or in plywood case.

The thick the deviation of admission(do not include the weld sew) in wall of the weld tube is for ruling the wall thick 10% of \pm , but minimum admission deviation is the 0.02 mms of \pm .

The weld takes care of of settle Chinese foot length as 3 ms~9 ms, general settle the Chinese foot with the 6 ms.

The weld takes care of of settle the Chinese foot length in usually length, its the deviation of admission is the 5 mms of \pm .

Adopt partial the degree of flinch in a the tube of weldfor keeping the Chinese foot measurement should not very in 2.0 mms.

The machine function sees the table 5

table 5

Steel number	Card number	The heat handles Make degree	The anti- pulls the strength MPa	Accept defeat the strength MPa	Extension rate%	Degree of hardnessHRB
0Cr19Ni19	304	≥1010°C Nasty and cold	≥520	≥205	40	≤90
00Cr19Ni11	304L	" "	≥480	≥175	40	≤90
0Cr17Ni12M02	316	" "	≥520	≥205	40	≤90
0Cr17Ni14M02	316L	" "	≥480	≥175	40	≤90
0Cr18Ni11Ti	321	≥920°C Nasty and cold	≥520	≥205	40	≤90

FAQ

Q: Are you trading company or manufacturer ?

A: We are factory.

Q: How long is your delivery time?

A: Generally it is 5-10 days if the goods are in stock. or it is 15-20 days if the goods are not in stock, it is according to quantity.

Q: Do you provide samples ? is it free or extra ?

A: Yes, we could offer the sample for free charge but do not pay the cost of freight.

Q: What is your terms of payment ?

A: 100% T/T advance. (For small order.)

B: 30% T/T and balance against copy of documents.

C: 30% T/T advance, balance L/C at sight

D: 30% T/T , balance L/C usance

E: 100% L/C usance.



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd



15858820108



sales@zhehengsteel.com



stainless-steelseamlesspipe.com

No999 .wenzhou airport wenzhou city,zhejiang china