



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd
stainless-steelseamlesspipe.com




90 Degree Elbow Stainless Steel Gas Pipe Fittings Simple Calculation Formula

Our Product Introduction

for more products please visit us on stainless-steelseamlesspipe.com

Basic Information

- Place of Origin: CHINA
- Brand Name: zheheng
- Certification: ISO9001 PED
- Model Number: 4"*sch10s
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: In bundles with waterproof material, or wooden crate packing
- Delivery Time: 30 DAYS
- Payment Terms: L/C, T/T, D/A, D/P
- Supply Ability: 100TONS/30DAYS

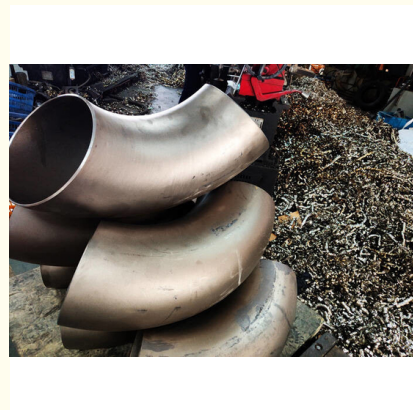

Product Specification

- Standard: ASTM A403
- Packing: Wooden Case, plastic Wove
- Type: Elbow
- Technique: Butt Welding Fittings
- Applications: Metallurgy, Shipbuilding
- Material: 45, 90 Degree Elbow
- Highlight: **Stainless Steel Gas Pipe Fittings, Stainless Steel 90 Degree Elbow, ASTM A403 Stainless Steel Pipe**



Product Description

ASTM A403 stainless steel pipe fitting and calculating formulas easy

zheheng steel is a professional producer for A403 stainless steel pipe fitting,

Type : Stainless steel pipe fitting welding elbow

Size : 1/2"~100" DN10~DN250

Wall thickness :2mm~80mm

Standards ; ANSI, ASTM,DIN, JIS, BS, ISO, GB, SH, AND HG

Material : Stainless Steel: ASTM A403 WP304, 304L, 310, 316, 316L, 321, 347, 904L

Surface treatment Sand Rolling, Sand Blasting ,Acid Cleaning.

Packing : wooden case, pallet or as customers' requirement

Applications : Petroleum,chemical,power,gas,metallurgy, shipbuilding, constructio

product details:

Wall Thickness	SCH5S - SCH160
Standard	ASME. JIS . DIN. EN. ISO .GB .HG
Type	concentric,eccentric
Surface treatment	Sand Rolling, Sand Blasting ,Acid Cleaning.
Applications	Petroleum, chemical, power, gas, metallurgy, shipbuilding, construction, etc

3.1Chemical Composition:3. Material

Grade	C	Si	Mn	P	S	Ni	Cr	Mo	N
201(1Cr17Mn6Ni5N)	≤0.15	≤1.0	≤5.5	≤0.06	≤0.03	3.5-5.5	16.0-18.0	—	≤0.25
202(1Cr18Mn8Ni5N)	≤0.15	≤0.07	≤7.5	≤0.06	≤0.03	4.0-6.0	17.0-19.0	—	≤0.25
304(0Cr18Ni9)	≤0.08	≤0.07	≤2.0	≤0.04	≤0.03	8.0-11.0	18.0-20.0	—	—
304L(00Cr18Ni10)	≤0.03	≤0.07	≤2.0	≤0.04	≤0.03	8.0-11.0	18.0-20.0	—	—
305	≤0.12	≤1.00	≤2.00	≤0.045	≤0.030	10.5-13.0	17.0-19.0	—	—
316(0Cr17Ni12Mo2)	≤0.08	≤0.07	≤2.0	≤0.04	≤0.03	11.0-14.0	16.0-18.0	2.0-3.0	—
316L(0Cr17Ni14Mo2)	≤0.03	≤0.07	≤2.0	≤0.04	≤0.03	11.0-14.0	16.0-18.0	2.0-3.0	—
309s	≤0.08	≤1.00	≤2.0	≤0.045	≤0.03	12.00-15.00	22.00-24.00	—	—
310s	≤0.08	≤1.50	≤2.0	≤0.045	≤0.03	19.00-22.00	24.00-26.00	—	—



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd

