



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd
stainless-steelseamlesspipe.com


A312/ A312M TP309S S30908 Stainless Steel Pipe Tube Used In Furnace Material

Our Product Introduction

for more products please visit us on stainless-steelseamlesspipe.com


Basic Information

- Place of Origin: CHINA
- Brand Name: zheheng steel
- Certification: iso9001
- Model Number: 88.9mm
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: In bundles with waterproof material, or wooden crate packing
- Delivery Time: 30 DAYS
- Payment Terms: L/C, T/T, D/A, D/P
- Supply Ability: 50TONS/30DAYS



Product Specification

- Material: Tp309s
- Standard: ASTM, GB, JIS, DIN, EN, AISI
- Material TYPE: S30908
- Technique: Cold-drawn
- APPLICATION: Pyrochemical Process
- Package: Woven Packing
- OD: 6-830mm
- Highlight: **S30908 Stainless Steel Pipe,
TP309S Stainless Steel Pipe,
A312M Stainless Steel Tube**

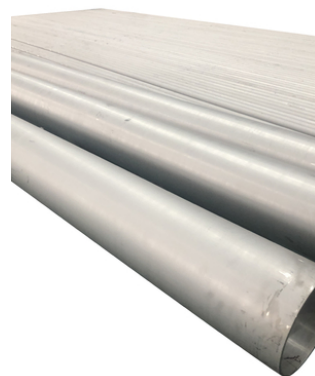

Product Description

Stainless Steel Pipe Tube A312/ A312M TP309S S30908 Used in furnace material

Introduction to products:

The corresponding Chinese brand of 309S is 0Cr23Ni13, and the American standard S30908 (American AISI, ASTM) characteristics and uses: corrosion resistance and heat resistance are better than 0Cr19Ni9.

The 309s is a variant of the lower carbon 309 stainless steel for use where welding is required. The lower carbon content minimizes the carbides precipitated in the heat-affected zone near the weld, which can lead to intergranular corrosion (welding erosion) in stainless steel in some environments.

APPLICATIONS :

Use: furnace material.

Widely used in boilers, energy (nuclear power, thermal power, fuel cell), industrial furnaces, incinerators, heating furnaces, chemical, petrochemical and other important fields.

Chemical Composition of 309S(S30908)

	C	Si	Mn	Ni	P	S	Cr	Nb
Min	0.04			9			17	
Max	0.10	1	2	12	0.045	0.030	19	8xC- 1.10

Description for our production range:

Name :Stainless Steel seamless Pipe

Standard :

A213

Material Grade :

S34709

Diameter :OD: 6-830mm

W.T: 0.6mm - 60mm

Length :Up to 13 meter or as customers' request

Tolerance :According to the Standard.

Surface :

Natural Color of annealing & pickling, 180G, 320G, 400G Satin / Hairline

400G, 500G, 600G or 800G Mirror finish

Test :

UT, ET, HT, RT,ect, and others according to the standard,

or as the requests of the customer

our products packing:

**Tensile Requirements – Stainless Steel 310S/310H:**

Tensile Strength (KSI): 75

Yield Strength (KSI): 30

Notes:

10-6-K-1 = 10-6/K

1 Ω -mm²/m = 1 $\mu\Omega$ ·m

1 g/cm³ = 1 kg/dm³ = 1000 kg/m³

1 GPa = 1 kN/mm²

1 MPa = 1 N/mm²

other supplement:

- 1.A999/A999M: Each pipe shall be subjected to the nondestructive electric test or the hydrostatic test, the pipe of test to be used shall be at the option of the mfg, unless otherwise specified in the PO.
2. The Pipe lengths : Unless otherwise agreed upon, all size from NPS 1/8" TO AND INCLUDING nps 8 are available in a length up to 24ft with the permitted range of 15 to 24 ft. Short length are acceptable and the number and min, length shall be agreed upon between mfg and purchaser.
3. The finished pipe shall be reasonably straight and shall have workmanlike finish, Removal of imperfections by grinding is permitted, provided the W.T are not decreased to the less than the permitted in Section 9 of Specification A999/A999M
4. Butt Weld End: According to ANSI B 16.25
5. Pipe Marking: Specified in A999/999M, include "Logo+Standard+SIZE+Heat No.+Lot No.+H.T/E.T/U.T"
6. Packing: Each Pipe end is protected by Plastic cap. Then packed by Anti-rust steel strip, The outside of the bundle is plastic woven bag, or Plastic film.
7. Packing Mark: SIZE + STEEL GRADE+ QTY OF PIECE/WEIGHT/METRE.
- 8.MTC: BWSS Official Original MTC paper will be supplied for each order.



ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd



15858820108



sales@zhehengsteel.com



stainless-steelseamlesspipe.com

No999 .wenzhou airport wenzhou city,zhejiang china