




ZHEHENG STEEL

Wenzhou Zheheng Steel Industry Co.,Ltd  
stainless-steelseamlesspipe.com



## S32750 / 1.4507 Duplex Steel Pipe With Bright Finish Seamless And Welded

Our Product Introduction

for more products please visit us on [stainless-steelseamlesspipe.com](http://stainless-steelseamlesspipe.com)


### Basic Information

- Place of Origin: CHINA
- Brand Name: zheheng
- Certification: ISO9001 PED
- Model Number: 19mm
- Minimum Order Quantity: Negotiable
- Price: Negotiable
- Packaging Details: In bundles with waterproof material, or wooden crate packing
- Delivery Time: 30 DAYS
- Payment Terms: L/C, T/T, D/A, D/P
- Supply Ability: 50TONS/30DAYS



### Product Specification

- Steel Grade: Duplex Steel
- Standard: A789
- Type: Seamless
- Technique: Cold Drawing
- Application: Decoration, Construction And Upholstery
- Material: S32750 / 2550 / 1.4507 / X2CRNIMOCUN25-6-3
- Highlight: **welding 2205 duplex stainless steel, duplex stainless steel tube**

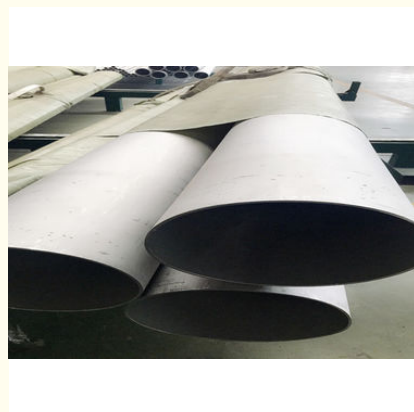

## Product Description

### S32750 / 2550 / 1.4507 / X2CRNIMOCUN25-6-3 Duplex Steel Pipe / A789 Seamless and Welded

zheheng steel as professional producer for duplex steel pipes ,X2CRNIMOCUN25-6-3 Super Duplex Steel Pipe seamless stainless steel pipes ,S32750 duplex steel pipes seamless duplex steel pipe ,1.4507 duplex steel pipe, 2550 duplex steel pipe , , ASTM A789 ,ASTM A790 duplex steel pipe ,s37550 super duplex steel pipe ,Standard Specification for Seamless and Welded Ferritic/Austenitic Stainless Steel

Tubing for General Serviceand we are also could supply to you

steel sheets, steel plates, steel coils, steel pipes, steel tubes, steel bars, steel circles, square steel, hexagonal bar, steel tube, steel pipe fittings, flanges, etc. And also we can produce according to the requirments of the costomer. The production capacity of our company is anout 200000 tons per year. .

#### Details description :

Material:

201.202.301.302.304.304L.310S.316.316L.321.430.430A.309S.2205.2507.

2520.430.410.440.904Lect. Or Customized

Standard: GB, AISI, ASTM, ASME, EN, BS, DIN, JIS

Size: ANSI /ASME size is under,other standard of size is for ready choice,O.D.:0.23"to 48"(5.8-1219mm)W.T.:0.04"to 2"(1.0-50.8mm)

Length: Max.18 Meter,NPS 1/8"-48" Schedule:5/5S,10/10S,20/20S,40/40S,80/80S,120/120S,160/160S according to ANSI B36.19/36.10

Surface: Satin Finish(180#.240#.320#),Bright Finish(400#.600#,mirror),Mill Finish(2B),Hairline-Finish(HL/Brushed),Ti-gold, Glossy matt,dull and so on.

Application: Decoration, construction and upholstery, etc

#### S32750 / 2550 / 1.4507 / X2CRNIMOCUN25-6-3 Super Duplex Steel Pipe chemical composition

 A 789/A 789M - 05a

TABLE 1 Chemical Requirements<sup>a</sup>

UNS Designation <sup>a</sup>	C	Mn	P	S	Si	Ni	Cr	Mo	N	Cu	Others
S31200	0.030	2.00	0.045	0.030	1.00	5.5-6.5	24.0-26.0	1.20-2.00	0.14-0.20	...	...
S31260	0.030	1.00	0.030	0.030	0.75	5.5-7.5	24.0-26.0	2.5-3.5	0.10-0.30	0.20-0.80	W 0.10-0.50
S31500	0.030	1.20-2.00	0.030	0.030	1.40-2.00	4.3-5.2	18.0-19.0	2.50-3.00	0.05-0.1	...	...
S31803	0.030	2.00	0.030	0.020	1.00	4.5-6.5	21.0-23.0	2.5-3.5	0.08-0.20	...	...
S32001	0.030	4.00-6.00	0.040	0.030	1.00	1.0-3.0	19.5-21.5	0.60	0.05-0.17	1.00	...
S32003	0.030	2.00	0.030	0.020	1.00	3.0-4.0	19.5-22.5	1.50-2.00	0.14-0.20	...	...
S32101	0.040	4.0-6.0	0.040	0.030	1.00	1.35-1.70	21.0-22.0	0.10-0.80	0.20-0.25	0.10-0.80	...
S32205	0.030	2.00	0.030	0.020	1.00	4.5-6.5	22.0-23.0	3.0-3.5	0.14-0.20	...	...
S32304	0.030	2.50	0.040	0.040	1.00	3.0-5.5	21.5-24.5	0.05-0.60	0.05-0.20	0.05-0.60	...
S32520	0.030	1.50	0.035	0.020	0.80	5.5-8.0	23.0-25.0	3-5	0.20-0.35	0.50-3.00	...
S32550	0.04	1.50	0.040	0.030	1.00	4.5-6.5	24.0-27.0	2.0-3.9	0.10-0.25	1.50-2.50	...
S32750	0.030	1.20	0.035	0.020	0.80	6.0-8.0	24.0-26.0	3.0-5.0	0.24-0.32	0.50	...
S32760	0.05	1.00	0.030	0.010	1.00	6.0-8.0	24.0-26.0	3.0-4.0	0.20-0.30	0.50-1.00	W 0.50-1.00 40 min <sup>c</sup>
S32808	0.030	1.10	0.030	0.030	0.50	7.0-8.2	27.0-27.9	0.80-1.20	0.30-0.40	...	W 2.10-2.50
S32900	0.08	1.00	0.040	0.030	0.75	2.5-5.0	23.0-28.0	1.00-2.00	...	...	...
S32906	0.030	0.80-1.50	0.030	0.030	0.50	5.8-7.5	28.0-30.0	1.50-2.60	0.30-0.40	0.80	...
S32950	0.030	2.00	0.035	0.010	0.60	3.5-5.2	26.0-29.0	1.00-2.50	0.15-0.35	...	...
S36274	0.030	1.00	0.030	0.020	0.80	6.0-8.0	24.0-26.0	2.5-3.5	0.24-0.32	0.20-0.80	W 1.50-2.50
S36277	0.025	0.80	0.025	0.002	0.80	6.5-8.0	24.0-26.0	3.00-4.00	0.23-0.33	1.20-2.00	W 0.80-1.21

we are also supply other steel grade regularly

#### Production Range:

Austenitic Steel:	TP304,TP304L,TP304H,TP304N, TP310S,TP316,TP316L,TP316Ti,TP316H,TP317,TP317L, TP321, TP321H,TP347, TP347H,904L...
Duplex Steel :	S32101,S32205,S31803,S32304,S32750, S32760 Others:TP405,TP409, TP410, TP430, TP439 ...
Russia Standard	08X17T,08X13,12X13,12X17,15X25T,04X18H10,08X20H14C2, 08X18H12E,10X17H13M2T,10X23H18,08X18H10,08X18H10T,08X18H12T,08X17H15M3T,12X18H10T,12X18H12T,12X18H9, 17X18H9, 08X22H6T,

#### Repair by Welding

For welded pipe of size NPS 6 or larger with a specified wall thickness of 0.188 in. [4.8 mm] or more, weld repairs made with the addition of compatible filler metal may


be made to the weld seam with the same procedures specified for plate defects in the section on Repair by Welding of Specification A 999/A 999M.

Weld repairs of the weld seam shall not exceed 20 % of the seam length.

#### SUPPLEMENTARY REQUIREMENTS FOR PIPE REQUIRING SPECIAL CONSIDERATION

One or more of the following supplementary requirements shall apply only when specified in the purchase order. The purchaser may specify a different frequency of test or analysis than is provided in the supplementary requirement. Subject to agreement between the purchaser and manufacturer, retest and retreatment provisions of these supplementary requirements may also be modified.

#### product show:

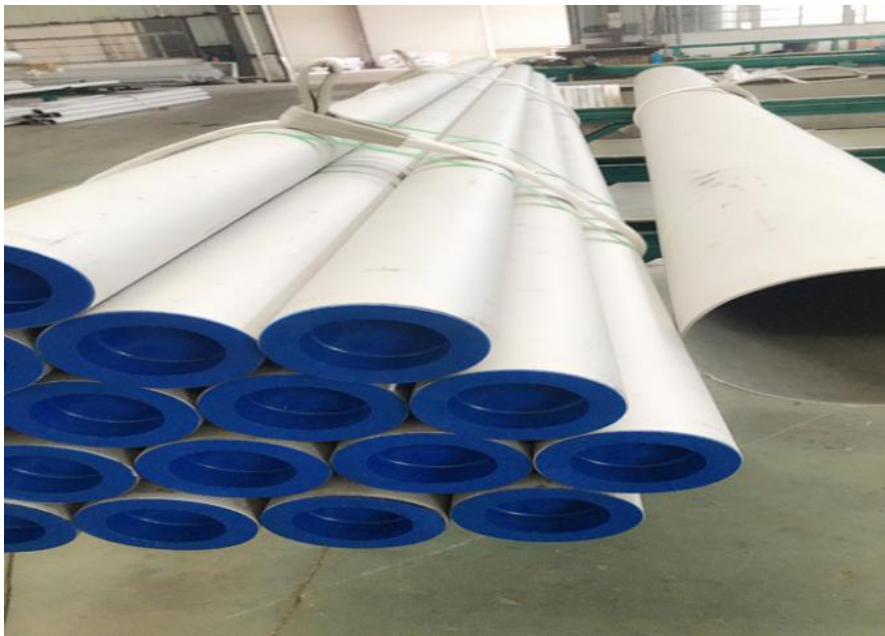

ZHEHENG STEEL

**Wenzhou Zheheng Steel Industry Co.,Ltd**

☎ 15858820108

✉ [sales@zhehengsteel.com](mailto:sales@zhehengsteel.com)

🌐 [stainless-steelseamlesspipe.com](http://stainless-steelseamlesspipe.com)

No999 .wenzhou airport wenzhou city,zhejiang china